Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/023527

International filing date: 01 July 2005 (01.07.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US

Number: 60/615,810


Filing date: 04 October 2004 (04.10.2004)

Date of receipt at the International Bureau: 17 August 2005 (17.08.2005)

Remark: Priority document submitted or transmitted to the International Bureau in

compliance with Rule 17.1(a) or (b)



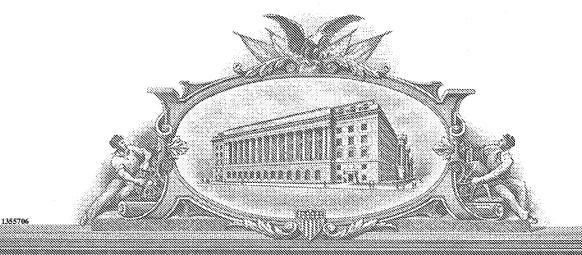

'and and and vandamentess; presents; searce, comes;

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

August 10, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/615,810 FILING DATE: October 04, 2004

RELATED PCT APPLICATION NUMBER: PCT/US05/23527

Certified by

Under Secretary of Commerce for Intellectual Property and Director of the United States Patent and Trademark Office

Express Mail Label No.

Under the Paperwork Reduction Act of 1995, no person **PROVISIONAL** This is a request for filing a PR

ns are required to respond to a collection of APPLICATION FOR PATENT C ROVISIONAL APPLICATION FOR PA		10 10		
EV 400364165 US		U.S. 158	404	Table of the Control
INVENTOR(S)		96		diam'r.
ily Name or Sumame	Residence (City and either State or Foreign Country)	<u> </u>		Mark than B.

<u> </u>						
INVENTOR(S)						
ven Name (first and mid	idle [if any]	Family Name or Sumame		(City a	Residence (City and either State or Foreign Country)	
Yiqun (NMN)	·	Huang		San A	San Antonio, Texas	
Additional inventors are b	eing named on the	1	_separately numl	ered sheets a	attached h	ereto
	TIT	LE OF THE INVENTION	(500 character	s max)		
		S DESULFATION OF ESPONDENCE ADDRESS				
Direct all correspondence	<u> </u>	ESPONDENCE ADDRESS	رر	LESEL PAI	RTICUL	ATE FILTER
Customer Number:						
OR	<u></u>					
X Firm or Individual Name	Ted D. Lee					
Address	Gunn & Lee,	PC				
Address	700 N. St.	Mary's St., Suit	e 1500			
City	San Antonio		State	TX	Zip	78205
Country	USA		Telephone 210	8869500	Fax	210/886-9883
	ENCLO	SED APPLICATION PAR	RTS (check all	that apply)		
X Specification Number of Pages 25 CD(s), Number						
X Drawing(s) Number of Sheets3 Other (specify)						
Application Date Sh	eet. See 37 CFR 1.7	6				
METHOD OF PAYMENT	OF FILING FEES FO	OR THIS PROVISIONAL API	PLICATION FOR	PATENT		
Applicant claims small entity status. See 37 CFR 1.27. FILING FEE Amount (\$)						
A check or money order is enclosed to cover the filing fees.						
The Director is herby authorized to charge filing fees or credit any overpayment to Deposit Account Number:			0.00			
Payment by credit card. Form PTO-2038 is attached.						
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.						
No.						
Yes, the name of the U.S. Government agency and the Government contract number are:						
[Page 1 of 2] 074 4 2004						
Respectfully submitted. Date OCT. 4, 2004						
SIGNATURE REGISTRATION NO. 25,819						
TYPED or PRINTED NAME Ted D. Lee (if appropriate) Docket Number: P-17.164(PRO)			7.164(PRO)			
210 (995, 0500)						

TELEPHONE

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

PROVISIONAL APPLICATION COVER SHEET Additional Page

PTO/SB/16 (08-03)

Approved for use through 07/31/2006. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Docket Number P-17.164(PRO)

		7.164(PRO)
	INVENTOR(S)/APPLICANT(S)	
Given Name (first and middle [if any]	Family or Sumame	Residence (City and either State or Foreign Country)
Shizuo (NMN)	Sasaki	San Antonio, Texas
Gary D.	Neely	San Antonio, Texas
Jeffery A.	Leet	San Antonio, Texas

[Page 2 of 2]

2 of 2 Number

PTO/SB/17 (10-03)
Approved for use through 07/31/2006. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

FEE TRANSMITTAL for FY 2004

Effective 10/01/2003. Patent fees are subject to annual revision.

X Applicant claims small entity status. See 37 CFR 1.27

TOTAL	AMOUNT	OF I	PAYMENT
IUIAL	MAIOOIA	UF	PATRICIA I

SUBMITTED BY

Name (Print/Type)

Signature

Ted D. Lee

(\$)

spond to a conection or line	rmanori urness it displays a valid OMB control number
Co	omplete if Known
Application Number	
Filing Date	
First Named Inventor	Yiqun (NMN) Huang
Examiner Name	
Art Unit	
Attorney Docket No.	D 17 164/DDO)

(Complete (if applicable))

Oct.

210/886-9500

2004

4,

Telephone

METHOD OF PAYMENT (check all that apply)	FEE CALCULATION (continued)			
Check Credit card Money Other None	3. ADDITIONAL FEES			
Deposit Account:	Large Entity 1 Small Entity			
Deposit Deposit	Fee Fee Fee Fee Fee Description Code (\$) Fee Paid			
Account 50_0808	Code (\$) Code (\$) Fee Paid			
Number Deposit	1052 50 2052 25 Surcharge - late provisional filing fee or			
Account Name	cover sheet			
The Director is authorized to: (check all that apply)	1053 130 1053 130 Non-English specification			
Charge fee(s) indicated below Credit any overpayments	1812 2,520 1812 2,520 For filing a request for ex parte reexamination			
X Charge any additional fee(s) or any underpayment of fee(s)	1804 920* 1804 920* Requesting publication of SIR prior to Examiner action			
Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.	1805 1,840* 1805 1,840* Requesting publication of SIR after Examiner action			
	1251 110 2251 55 Extension for reply within first month			
FEE CALCULATION	1252 420 2252 210 Extension for reply within second month			
1. BASIC FILING FEE Large Entity Small Entity	1253 950 2253 475 Extension for reply within third month			
Fee Fee Fee Fee Description Fee Paid	1254 1,480 2254 740 Extension for reply within fourth month			
Code (\$) Code (\$) 1001 770 2001 385 Utility filing fee	1255 2,010 2255 1,005 Extension for reply within fifth month			
1002 340 2002 170 Design filing fee	1401 330 2401 165 Notice of Appeal			
1003 530 2003 265 Plant filing fee	1402 330 2402 165 Filing a brief in support of an appeal			
1004 770 2004 385 Reissue filing fee	1403 290 2403 145 Request for oral hearing			
1005 160 2005 80 Provisional filing fee 80	1451 1,510 1451 1,510 Petition to institute a public use proceeding			
SUBTOTAL (1) (\$) 80	1452 110 2452 55 Petition to revive - unavoidable			
	1453 1,330 2453 665 Petition to revive - unintentional			
2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE	1501 1,330 2501 665 Utility issue fee (or reissue)			
Extra Claims below Fee Paid	1502 480 2502 240 Design issue fee			
Independent	1503 640 2503 320 Plant issue fee			
Claims	1460 130 1460 130 Petitions to the Commissioner			
	1807 50 1807 50 Processing fee under 37 CFR 1.17(q)			
Large Entity Small Entity Fee Fee Fee Fee <u>Fee Description</u>	1806 180 1806 180 Submission of Information Disclosure Stmt			
Code (\$) Code (\$)	8021 40 8021 40 Recording each patent assignment per property (times number of properties)			
1202 18 2202 9 Claims in excess of 20	1809 770 2809 385 Filing a submission after final rejection			
1201 86 2201 43 Independent claims in excess of 3	(37 CFR 1.129(a))			
1203 290 2203 145 Multiple dependent claim, if not paid	1810 770 2810 385 For each additional invention to be examined (37 CFR 1.129(b))			
1204 86 2204 43 ** Reissue independent claims over original patent	1801 770 2801 385 Request for Continued Examination (RCE)			
1205 18 2205 9 ** Reissue claims in excess of 20 and over original patent	1802 900 1802 900 Request for expedited examination of a design application			
· · · · · · · · · · · · · · · · · · ·	Other fee (specify)			
SUBTOTAL (2) (\$) **or number previously paid, if greater; For Reissues, see above	*Reduced by Basic Filing Fee Paid SUBTOTAL (3) (\$)			
para, in ground, in driving out above	, NT/			

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Registration No.

25,819

Certificate of Mailing under 37 CFR 1.8

> Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

on October 4, 2004

Date

SHIRLEY MCINTYRE

Typed or printed name of person signing Certificate

- 1. Provisional Application for Patent Cover Sheet
- 2. Fee Transmittal
- 3. Spēcification
- 4. Drawings
- 5. Check for \$80.00
- 6. Acknowledgment postcard

This collection of information is required by 37 CFR 1.8. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 1.8 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Provisional Patent Application Inventors: Yiqun Huang, et al. Assignee: Southwest Research Institute

Atty. Docket No.: P-17.164PRO)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

TITLE:

METHOD FOR THE SIMULTANEOUS DESULFATION OF A LEAN NOX TRAP AND REGENERATION OF A DIESEL PARTICULATE FILTER

INVENTORS:

Yiqun Huang Shizuo Sasaki Gary D. Neely Jeffery A. Leet

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

BACKGROUND OF THE INVENTION

Technical Field

This invention relates generally to a method for removing sulfur from a lean NOx trap while simultaneously regenerating a Diesel particulate filter, and more particularly to such a method that controls the duration and frequency of engine operation in a rich combustion mode concurrently with control of the air/fuel ratio to provide the high temperature requirements of lean NO_x trap desulfation and the oxidation of particles trapped in a Diesel particulate filter.

Background Art

Worldwide emissions regulations slated for introduction in the near future impose very stringent emissions regulations. The Tier 2 regulations in the United States require that Diesel vehicles have the same ultra-low emissions levels as spark ignited vehicles. Combustion mode changes, to address both in-cylinder (engine-out) and exhaust gas treatment device requirements have been proposed. For example, U.S. Patent No. 5,732,554, issued March 31, 1998 to Shizuo Sasaki, et al. for an *EXHAUST GAS PURIFICATION DEVICE FOR AN INTERNAL COMBUSTION ENGINE* describes a method by which the normal fuel lean operating mode of an engine is switched to a rich premixed charge compression ignition (PCCI) combustion mode.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

U.S. Patent No. 5,937,639 granted August 17, 1999 to Shizuo Sasaki, et al. for *INTERNAL COMBUSTION ENGINE* describes an alternative method for lowering the combustion temperature, i.e., low temperature combustion (LTC) to minimize smoke generation during rich, or near rich, combustion. LTC and PCCI combustion are alternative combustion modes which normal Diesel lean combustion can be transitioned to during engine operation.

Perhaps of most concern to the Diesel engine market are the proposed very tight future reductions in terms of oxides of nitrogen (NO_x) and particulate matter (PM) emissions. One of the most promising technologies for NO_x treatment are NO_x adsorbers, also known as "lean NO_x traps". Diesel particulate filters, also known as Diesel particulate traps, and lean NO_x traps are the most likely, at least in the foreseeable future, means by which emissions will be reduced. Lean NO_x traps and Diesel particulate filters need to be regenerated periodically to restore their efficiencies. The regeneration of lean NO_x traps is usually done by providing reductants, such as CO_x and CO_x traps are the most likely, at least in the providing reductants are considered periodically to restore their efficiencies. The regeneration of lean NO_x traps is usually done by providing reductants, such as CO_x and CO_x traps are the most likely, at least in the explain the regeneration of lean CO_x traps are the most likely, at least in the foreseeable future, means by which emissions will be reduced. Lean CO_x traps and CO_x traps are the most likely, at least in the foreseeable future, means by which emissions will be reduced. Lean CO_x traps and CO_x traps are the most likely, at least in the foreseeable future, means by which emissions will be reduced. Lean CO_x traps and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least in the foreseeable future, and CO_x traps are the most likely, at least

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

combustion operation, such very high temperatures cannot normally be obtained except under very high load conditions. Diesel particulate filter regeneration is carried out by oxidizing soot and other particles "trapped" in the Diesel particulate filter at a high temperature and a lean air/fuel ratio.

Thus it can be seen that both desulfation of a lean NO_x trap and regeneration of a Diesel particulate filter require very high temperatures. However, typical Diesel combustion cannot provide high exhaust gas temperatures because the engine operates with a lean to very lean combustion mixture. Heretofore, post-injection or in-exhaust injection has been used to obtain the required aftertreatment device regeneration temperatures. Post-injection can result in undesirable oil dilution due to wetting of the cylinder liner, and in-exhaust injection requires extraneous hardware. Morever, the desulfation process requires a substantially oxygen free atmosphere, whereas Diesel particulate filter regeneration is an oxidization process. Heretofore, these conflicting requirements have, of necessity, been carried out in separate operations.

The present invention is directed to overcoming the problems set forth above. It is desirable to have a method by which desulfation of the a lean NO_x trap (LNT) is carried out concurrently with oxidizing trapped particulate matter in a Diesel particulate filter (DPF).

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

SUMMARY OF THE INVENTION

In accordance with one aspect of the present invention, a method for simultaneously removing sulfur from a lean NO_x trap and regenerating a Diesel particulate filter comprises identifying when desulfation of a lean NO_x trap associated with the engine is required, and then determining a desired rich combustion mode for temporary operation of the engine. The substrate temperature of the lean NO_x trap is sensed and the temperature of the exhaust gas prior to the exhaust gas passing through a turbocharger associated with the engine is also sensed. The engine is operated in alternating lean and rich combustion modes for respective predefined periods of time. The respective periods of time are of a frequency and duration that is sufficient to increase the substrate temperature of a lean NO_x trap to a temperature at which sulfur accumulations stored in the lean NO_x trap is reduced and the Diesel particulate trap is simultaneously regenerated.

Other features of the method for simultaneous lean NO_x trap sulfur removal and Diesel particulate filter regeneration include controlling the air/fuel ratio and the frequency and duration of time of operation in the alternating rich combustion mode to prevent the sensed temperature of exhaust gas prior to passing through the

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

turbine stage from exceeding a predefined value.

Another feature of the present invention includes determining that the engine is operating in a predefined relatively low load region of the engine operating range and then operating of the engine between alternating lean and rich combustion modes includes alternately operating the engine respectively in a lean low temperature combustion mode and a rich low temperature combustion mode.

Yet another feature of the method for simultaneous lean NO_x trap sulfur removal and Diesel particulate filter regeneration, in accordance with the present invention includes determining that the engine is operating in a predefined medium or high load region of the engine operating range and then operating the engine in alternately lean and rich combustion modes, wherein the lean combustion mode may be either standard Diesel or lean premixed charge compression ignition combustion and the rich combustion mode is provided by rich pre-mixed charge compression ignition combustion.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method for simultaneously removing sulfur from a lean NO_x trap and regenerating a Diesel particulate filter may be had by reference to the following detailed description when taken in conjunction with the

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

accompanying drawings, wherein:

Fig. 1 is a somewhat schematic illustration of a typical Diesel engine suitable for the purpose of illustrating the method embodying the present invention;

Fig. 2 is a graphical illustration of the air/fuel ratio control to provide high lean NO_x trap and Diesel particulate filter temperatures in accordance with the present invention;

Fig. 3 is a graphical illustration of the use of alternating lean low temperature combustion and rich low temperature combustion for simultaneous lean NO_x trap desulfation and DPF regeneration; and

Fig. 4 is a graphical representation of alternating pre-mixed charge compression ignition lean and rich combustion control operation for lean NO_x trap desulfation and Diesel particulate filter regeneration in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

As discussed above, low temperature combustion (LTC) and pre-mixed charge compression ignition (PCCI) are alternative modes of combustion other than conventional Diesel combustion. Both LTC and PCCI combustion modes can provide the high temperature requirements for aftertreatment device regeneration, while

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

minimizing smoke generation maintaining low NOx emissions.

Lean and rich operation can be provided in both LTC and PCCI combustion modes. Lean operation, i.e., a mixture of intake air and fuel that is leaner than a stoichiometric mixture (an ideal air-to-fuel mixture at which all of the air and all of the fuel are consumed during the combustion process), is typical of normal Diesel operation Rich operation, i.e., an air-to-fuel mixture richer than stoichiometric, can be provided by throttling the intake air, increasing the exhaust gas recirculation (EGR) rate and varying turbocharger operation. There are various methods for injecting the additional fuel necessary to provide rich operation and control intake throttle, exhaust gas recirculation, and turbocharger operation. The "air-to-fuel ratio" (air/fuel ratio or simply A/F ratio) as used herein refers to the combustible mixture of air and fuel present in a combustion chamber either prior to, during, or immediately after combustion, and may consist of one or more components including ambient air, recirculated exhaust gas, and compressed air provided by the compressor stage of a turbocharger.

In the preferred embodiment of the present invention, alternating rich and lean low temperature combustion modes when operating under low to light load engine conditions, provide the required high lean NO_x trap and Diesel particulate

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

filter regeneration temperature as well as a rich exhaust gas mixture for desulfation of the LNT. Under medium to high load engine operating conditions, alternating rich pre-mixed charge compression ignition combustion (a stoichiometric or richer A/F ratio) and either normal Diesel or PCCI lean combustion provide the required high lean NO_x trap and Diesel particulate filter temperatures along with providing a rich exhaust for sulfur removal.

A conventional Diesel engine 10 is schematically represented in Fig. 1, and will be used in the following discussion of the method for simultaneously removing sulfur from a lean NO_x trap and regenerating a Diesel particulate filter in accordance with a preferred embodiment of the present invention. The Diesel engine 10 is equipped with a turbocharger 12 that has a turbine stage 14 driven by exhaust gas and coupled to a compressor stage 16 for the purpose of compressing intake air prior to introduction into the engine. Also, the engine 10 has a Diesel particulate filter 18 disposed downstream of the turbine stage 14 and a lean NO_x trap 20 positioned downstream of the Diesel particulate filter 18. A flow of compressed intake air is directed through an intake conduit 22 to an intake port 24 of the engine 10. Fuel is introduced into a combustion chamber 26 having a piston 28 by a fuel injector 30.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

26, exhaust gas is directed through an exhaust port 32 to an exhaust gas conduit 34 in controlled communication with the turbine stage 14 of the turbocharger 12. An exhaust gas recirculation (EGR) system 36 provides communication between the exhaust conduit 34 and the intake conduit 22 to recirculate controlled amounts of exhaust gas back into the intake air introduced into the engine. Exhaust gas flow through the EGR system 36 is controlled by an exhaust gas recirculation valve 38.

The engine 10 desirably has an intake air mass flow sensor 40, or other means for measuring intake air mass flow, disposed upstream of the compressor stage 16, and temperature sensor 42 disposed in the exhaust conduit 34 at a position upstream between the exhaust port 32 and the turbine stage 14 of the turbocharger 12. Additional temperature sensors 46 and 48 are arranged to respectively sense the internal, i.e., substrate or other, temperature of the Diesel particulate filter 18 and the lean NO_x trap 20. Additionally, a crankshaft position sensor 50 provides crankshaft position and engine speed signals to a conventional programmable electronic engine control unit (ECU) 52. The intake air mass flow sensor 40, the pre-turbine exhaust gas temperature sensor 42, the post-turbine exhaust gas temperature sensor 44, and the DPF and LNT temperature sensors 46, 48 are in electrical communication with the programmable ECU 52. In response to

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

sensed signals, as described below in greater detail, the programmable ECU 52 provides output signals to the fuel injector 30, the turbocharger 12, and the exhaust gas recirculation control valve 38.

In a preferred embodiment of the present invention, a requirement for sulfur removal from the LNT 20 is determined, for example, after a predetermined length of time of operation or by a suitable sensor, not shown, positioned downstream of the LNT. When it is determined that sulfur removal is required, the engine control module 52 determines the desired modes for respective alternating rich and lean combustion modes, that is, either normal Diesel, low temperature combustion or premixed charge compression ignition combustion. The determination for the desired combustion modes is primarily based on engine load and speed, parameters which can be at least partially provided by the intake air mass flow sensor 40, the injected fuel mass, and the crankshaft position sensor 50.

As illustrated in Fig. 2, the engine is then temporarily operated alternately between the desired rich and lean combustion modes for a selected length of time.

Exhaust gas produced during the alternating periods of lean combustion contain excess oxygen (oxygen not consumed during combustion) and, in the high temperature exhaust environment provided in accordance with the present invention,

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

oxidizes particulate matter trapped in the Diesel particulate filter 18. During the alternating periods of rich combustion, the amount of excess air, if any, is minimized and the lean Nox trap 20 is desulfated and regenerated. As illustrated in Figs 3 and 4, the DPF and LNT temperatures are maintained at a high temperature so that the respective regeneration and desulfation processes are advantageously simultaneously carried out during the alternating periods of lean and rich operation.

The duration and frequency of respective operation in the lean and rich combustion modes, and the respective lean and rich air/fuel ratios, and accordingly the mean air/fuel ratio, are controlled based on the temperature feedback signal from the temperature sensor 48 sensing the substrate temperature in the lean NO_x trap 20. As illustrated in Fig. 2, it can be seen that the lean air/fuel ratio decreases during the alternating periods of rich combustion and increases during the alternating periods of lean combustion. Also, it can be seen that the substrate temperature of the lean NO_x trap 20 and the Diesel particulate filter 18 decreases during alternating periods of lean combustion and increases during alternating periods of rich combustion.

Thus, the high lean $\mathrm{NO_x}$ trap and Diesel particulate filter temperatures required for removal of sulfur from the lean $\mathrm{NO_x}$ trap 20 and regenerate the Diesel

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

particulate filter 18 are provided by controlling the immediate and mean air/fuel ratios, and the duration and frequency of the respective periods of lean and rich combustion operation.

The pre-turbine exhaust gas temperature, sensed by the temperature sensor 42, provides a convenient safety control to limit the maximum equivalence ratio, both during rich and lean combustion, and the maximum pulse duration and frequency of rich combustion to avoid exceeding a temperature that could damage the turbine 14 or other downstream components. Moreover, the mean value of the A/F ratio during operation in the respective alternating lean and rich operation modes may be calculated by the engine control module 52 and used as input for the control logic to control fuel, exhaust gas recirculation, and air flow. By controlling the mean air/fuel ratio, the temperature gradient across the Diesel particulate filter and the lean NO_x trap can be limited.

Fig. 3 graphically illustrates engine operation in a defined relatively low, or light, load operating region of the engine in which low temperature combustion is desirably used for lean and rich operation. The substrate temperature of the lean NO_x trap 20 is used as a feedback signal for closed-loop control of the lean, rich, and mean A/F ratios, and pulse duration and frequency of operation in the respective

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

lean and rich combustion modes. Under very light load operation, the engine-out temperature is low, for example, on the order of 100°C to 200°C. Therefore, the alternating periods of lean and rich combustion must be carried out at a relatively high frequency to maintain the exothermic reactions in the DPF 18 and LNT 20 and increase the exhaust stream temperature discharged from the DPF.

When operating in predefined medium to high engine loads in which rich pre-mix charge compression ignition combustion is desired, the lean NO_x trap substrate temperature is also used as a feedback signal for closed-loop control of the lean, rich, and mean A/F ratios, and the duration frequency of the respective lean and rich combustion operating modes. As illustrated in Fig. 4, the pre-turbine temperature, sensed by the temperature sensor 42, disposed in the exhaust conduit 34 upstream of the turbine section 14, is also used as a feedback signal for adjusting the fuel injection parameters so that the pre-turbine temperature will not exceed the maximum working temperature of the turbocharger 12. Under higher loads, the engine-out exhaust gas temperature is much higher than at low loads. Therefore, the rich periods of alternating lean and rich combustion are carried out at a lesser frequency and for a shorter duration.

Thus, in accordance with the present invention, when it is determined that

1

2

3

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

sulfur accumulations stored in the lean NO_x trap needs to be reduced, or removed, the desired rich combustion mode, i.e., for example LTC or PCCI combustion, is determined by the engine control unit 52. The sensed substrate temperature of the lean NO, trap 20 is used to control the lean, rich, and mean A/F ratios, as well as the duration and frequency of the respective lean and rich combustion modes. The engine is alternately operated in the desired rich and lean combustion modes for respective predefined periods of time and at a frequency and duration sufficient to increase the mean substrate temperature of the lean NO_x trap 20 to a temperature at which the sulfur accumulations stored in the lean NO_x trap 20 is reduced and the Diesel particulate trap 18 is simultaneously regenerated. The pre-turbine exhaust gas temperature, sensed by the sensor 42, is used to regulate the A/F ratio and the frequency and duration of time in the respective alternating rich and lean combustion modes to prevent the sensed temperature of the exhaust gas prior to passing through the turbine stage 14 from exceeding a predefined value to prevent thermal damage to the turbocharger 14 or other engine component.

When it is determined that the engine 10 is operating in a predefined low load region of the engine operating range, it may be alternately operated in a respective lean low temperature combustion mode and a rich low temperature

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

combustion mode.

When it is determined that the engine 10 is operating in either a predefined medium or high load region of the engine operating range, the engine may be operated alternatingly in either a standard Diesel or in a lean pre-mixed charge compression ignition combustion mode, and a rich pre-mixed charge compression ignition combustion mode.

Importantly, when operating in any of the determined operating modes, the frequency and pulse duration of the respective combustion modes and air/fuel ratio is modified in response to the sensed value of the substrate temperature of the lean NO_x trap to provide a high exhaust gas temperature that is sufficient for LNT desulfation and DPF regeneration.

Moreover, if desired for the purpose of providing an exhaust gas temperature to heat the substrate of the lean NO_x trap 20 to a desired high temperature, the engine may be alternately operated respectively in either a standard Diesel combustion mode and a lean pre-mixed charge compression ignition combustion mode or a standard Diesel combustion mode supplemented by the post-injection of fuel.

In the above discussion of the present invention in which the substrate

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

temperature of the lean NOx trap if provided to a programmable electronic engine control unit for the purpose of controlling A/F ratio and the duration and frequency of the respective alternating lean and rich combustion modes, it should be recognized that the substrate temperature of the lean NOx trap can be used by the programmable electronic engine control unit to modify or control other engine operating parameters, such as the exhaust gas recirculation rate and the amount of boost provided to the intake air by the compressor stage 16 of the turbocharger 12.

From the above description, it can be seen that by controlling the frequency, pulse duration and A/F ratio of respective alternating lean and rich combustion, that the temperature and composition of the exhaust gas can be controlled in a manner such that the desulfation of the lean NO_x traps and regeneration of the Diesel particulate filters can be carried out simultaneously. Low temperature combustion and pre-mixed charge compression ignition modes are the preferred combustion modes to provide the very high mean temperatures required to remove sulfur from the LNT and regenerate the DPF.

The present invention is described above in terms of a preferred illustrative embodiment in which those skilled in the art will be able to readily determine the desired air/fuel ratio as well as the duration and frequency of respective operation in

1

2

3

4

5

6

7

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

the selected lean and rich combustion modes. Also, although Lean NO_{x} trap substrate temperature is used in the illustrative example to control respective lean and rich combustion, other appropriate temperature measurements, such as lean NO_{x} trap inlet temperature, could be used in carrying out the present invention.

Other aspects, features and advantages of the present invention may be obtained from a study of this disclosure and the drawings, along with the appended claims.

1

2

3

5

6

7

8

9

10

11

12

13

14

15

16

17

18

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

<u>CLAIMS</u>

What I claim is:

1. A method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter of a Diesel engine equipped with a turbocharger, said method comprising:

determining a need to reduce sulfur accumulations stored in said lean NO_x trap;

determining a desired rich combustion mode for temporary operation of the engine;

sensing the substrate temperature of said lean NO_x trap;

sensing the temperature of exhaust gas prior to the exhaust gas passing through a turbine stage of said turbocharger; and

alternatingly operating said engine in a lean combustion mode and said desired rich combustion mode for respective predefined periods of time, said respective periods of time being of a frequency and duration sufficient to increase said substrate temperature of the lean NO_x trap to a temperature at which said sulfur accumulations stored in the lean NO_x trap are reduced and said Diesel particulate trap is simultaneously regenerated.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

- 2. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in Claim 1, wherein said method includes controlling the air/fuel ratio and the frequency and duration of time of operation in said alternating lean and rich operating modes to prevent the temperature of the exhaust gas prior to passing through the turbine stage from exceeding a predefined value.
- 3. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in Claim 2, wherein said predefined value of temperature of the exhaust gas passing through the turbine stage is the maximum working temperature of the turbocharger.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

- 4. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in claim 1, wherein said determining a desired rich combustion mode for temporary operation of the engine includes determining that said engine is operating in a predefined low load region of the engine operating range, and said alternatingly operating said engine in a lean combustion mode and said desired rich combustion mode includes alternatingly operating said engine respectively in a lean low temperature combustion mode and a rich low temperature combustion mode.
- 5. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in claim 1, wherein said determining a desired rich combustion mode for temporary operation of the engine includes determining that said engine is operating in one of a predefined medium and high load region of the engine operating range, and said alternatingly operating said engine in a lean combustion mode and said desired rich combustion mode includes alternatingly operating said engine respectively in one of a standard Diesel combustion mode and a lean pre-mixed charge compression ignition combustion mode when lean combustion mode is desired, and in a rich pre-mixed charge

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

compression ignition combustion mode when rich combustion is desired.

6. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in claim 5, wherein the frequency and duration of said respective periods of time and the air/fuel ratio during the respective periods of time is modified in response to the sensed value of the substrate temperature of said lean NO_x trap.

and regeneration of a Diesel particulate filter, as set forth in claim 1, wherein said determining a desired rich combustion mode for temporary operation of the engine includes determining that said engine is operating in one of a predefined medium and high load region of the engine operating range, and said alternatingly operating said engine in a lean combustion mode and said desired rich combustion mode includes alternatingly operating said engine respectively in one of a standard Diesel combustion mode and a lean pre-mixed charge compression ignition combustion mode when lean combustion is desired, and in one of a standard Diesel combustion mode and a pre-mixed charge compression ignition mode, either of

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

- which may be supplemented by the post injection of fuel when rich combustion is
- desired.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

1

- 2
- 3
- 5
- 6
- 7

8

- 9
- 10
- 11
- 12

8. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in claim 1, wherein said method includes providing said sensed substrate temperature of the lean NO_x trap to a programmable electronic engine control unit and adjusting at least one engine

operating parameter in response to the sensed substrate temperature.

9. The method for simultaneous removal of sulfur from a lean NO_x trap and regeneration of a Diesel particulate filter, as set forth in claim 1, wherein said method includes controlling the mean air/fuel ratio to control the temperature and the temperature across said lean NO_x trap and said Diesel particulate filter.

Assignee: Southwest Research Institute Atty. Docket No.: P-17.164(PRO)

1

2

3

4

5

6

7

8

ABSTRACT OF THE DISCLOSURE

High exhaust gas temperatures whereby sulfur is removed from a lean NOx traps simultaneously with regeneration of a Diesel particulate filter is provided by alternating engine operation in respectively defined lean and rich combustion modes. The duration and frequency of the respective lean and rich operating modes, as well as the air/fuel ratio during the respective modes, are preferably controlled by the sensed temperature of the lean NOx trap substrate.

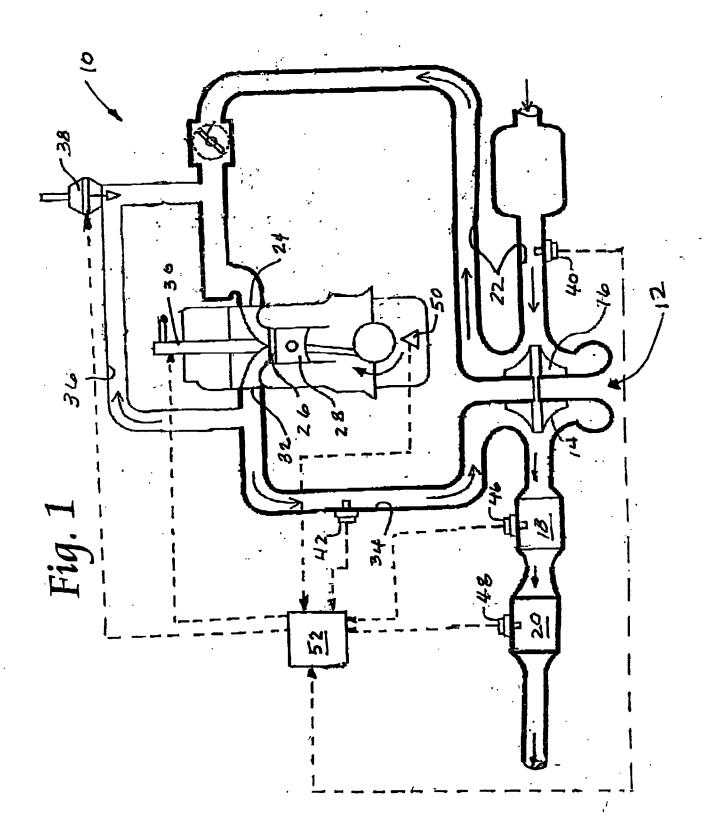


Fig. 2



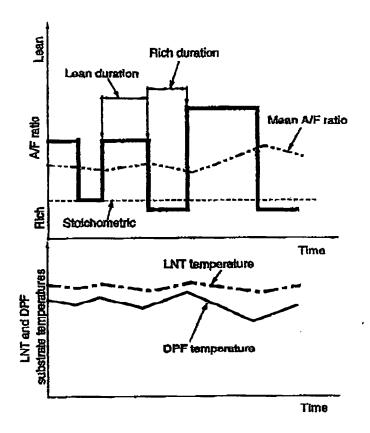


Fig. 3

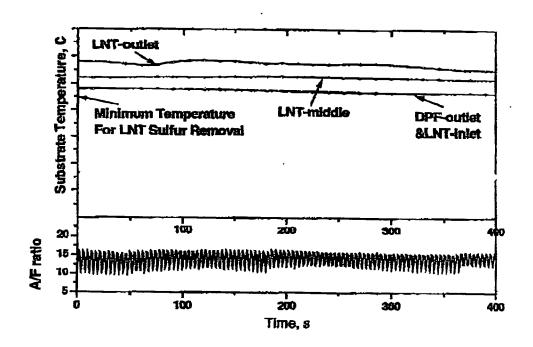

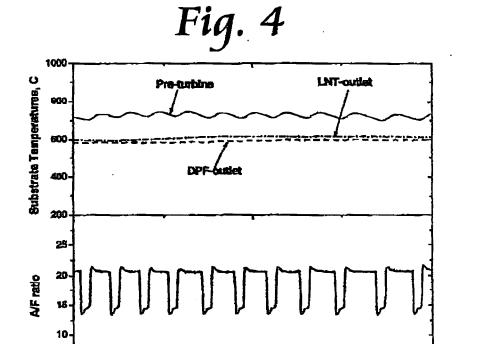

Thue